



APC Smart-UPS 3000VA uninterruptible power supply (UPS) 3 kVA 2700 W

Brand : APC

Product code: SUA3000I

Product name : Smart-UPS 3000VA

Smart-UPS 3000VA, 230V, 2700 W

APC Smart-UPS 3000VA uninterruptible power supply (UPS) 3 kVA 2700 W:

Smart-UPS 3000VA

APC Smart-UPS, 2700 Watts / 3000 VA, Input 230V / Output 230V, Interface Port DB-9 RS-232, USB, SmartSlot.

Includes: CD with software, Smart UPS signalling RS-232 cable, USB cable, User Manual.


APC Smart-UPS 3000VA. Output power capacity: 3 kVA, Output power: 2700 W, Input frequency: 50/60 Hz. Battery technology: Sealed Lead Acid (VRLA), Typical backup time at full load: 5.5 min, Typical backup time at half load: 13.6 min. Product colour: Black. Certification: C-tick, CE, EN 50091-1, EN 50091-2, GOST, VDE, RoHS 7b. Weight: 55.9 kg



Features		Operational conditions	
Output power capacity *	3 kVA	Operating relative humidity (H-H)	0 - 95%
Output power *	2700 W	Storage relative humidity (H-H)	0 - 95%
Input frequency *	50/60 Hz	Operating altitude	0 - 3000 m
Surge energy rating	365 J	Non-operating altitude	0 - 15000 m
Emergency Power Off (EPO)	✓	Certificates	
Noise level	53 dB	Certification	C-tick, CE, EN 50091-1, EN 50091-2, GOST, VDE, RoHS 7b
Audible alarm(s)	✓	Weight & dimensions	
Ports & interfaces		Weight	55.9 kg
USB 2.0 ports quantity	1	Packaging data	
Serial ports quantity	1	Package weight	65 kg
Battery		Logistics data	
Battery technology	Sealed Lead Acid (VRLA)	Products per pallet	3 pc(s)
Typical backup time at full load	5.5 min	Other features	
Typical backup time at half load	13.6 min	Interface	USB
Battery recharge time	3 h	Output connections	8 x IEC 320 C13 1 x IEC 320 C19 2 x IEC Jumpers
Design		Input connection type	IEC-320 C20, CEE 7 / EU1-16P, BS1363A
Product colour *	Black	Dimensions (WxDxH)	196 x 546 x 432 mm
LED indicators	✓	Nominal output voltage	230 V
Operational conditions		Output voltage note	220 - 240
Operating temperature (T-T)	0 - 40 °C	Filtering description	0.3% IEEE/UL 1449
Storage temperature (T-T)	-15 - 45 °C	Nominal input voltage	230 V
		Package dimensions (WxDxH)	380 x 760 x 680 mm



7313042168410

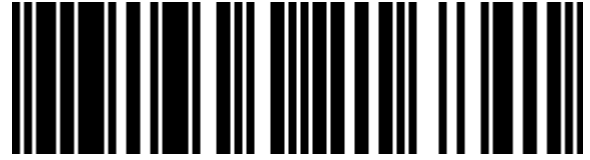

0731304216841



731304216841



5704875012087

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.