





APC Easy 3S uninterruptible power supply (UPS) Double-conversion (Online) 15 kVA 15000 W

Brand : APC

Product code: E3SUPS15KH

Product name : Easy 3S

APC Easy 3S. UPS topology: Double-conversion (Online), Output power capacity: 15 kVA, Output power: 15000 W. Form factor: Tower, Product colour: White, International Protection (IP) code: IP20. Certification: CE, EAC, IEC 62040-1-1, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE. Width: 250 mm, Depth: 700 mm, Height: 530 mm. Package width: 400 mm, Package depth: 857 mm, Package height: 772 mm

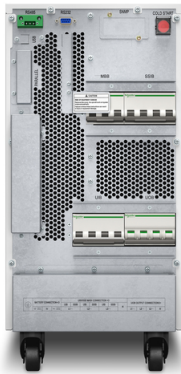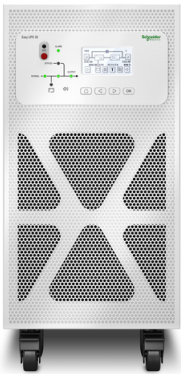


Features		Design	
UPS topology *	Double-conversion (Online)	Form factor *	Tower
Output power capacity *	15 kVA	Product colour *	White
Output power *	15000 W	International Protection (IP) code	IP20
Waveform *	Pure sine	Operational conditions	
Input operation voltage (min) *	304 V	Operating temperature (T-T)	0 - 40 °C
Input operation voltage (max) *	477 V	Storage temperature (T-T)	-15 - 40 °C
Input frequency *	45/65 Hz	Operating relative humidity (H-H)	0 - 95%
Output operation voltage (min)	380 V	Storage relative humidity (H-H)	0 - 95%
Output operation voltage (max)	415 V	Operating altitude	0 - 984.3 m
Output frequency	50/60 Hz	Non-operating altitude	0 - 14763.6 m
Maximum current	28 A	Certificates	
Number of input phases	3	Certification	CE, EAC, IEC 62040-1-1, IEC 62040-2, IEC 62040-3, IEC 62040-4, ISTA 2B, RCM, WEEE
Number of output phases	3	Packaging content	
Input power factor	0.99	Management card included	✗
Crest factor	3:1	Quick installation guide	✓
Overload capacity (10 minutes)	125%	Weight & dimensions	
Overload capacity (1 minute)	150%	Width	250 mm
Output voltage Total Harmonic Distortion (THD)	3%	Depth	700 mm
Input current Total Harmonic Distortion (THD)	3%	Height	530 mm
Noise level	60 dB	Weight	36 kg
Power protection features	Overload		

Ports & interfaces		Packaging data	
SmartSlot	✓	Package width	400 mm
SmartConnect port	✗	Package depth	857 mm
		Package height	772 mm
		Package weight	50 kg
		Logistics data	
		Harmonized System (HS) code	85078000
		Other features	
		Output voltage	400 V



0731304339335



731304339335

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.